



INSTRUCTIONS FOR USE

Model SP188


Congratulations on your purchase of the revolutionary SP188 Sawyer Complete Water Treatment System. Please review the instructions and precautions to make sure you receive the ultimate benefit from your filtration system.

PRECAUTIONS AND WARNINGS

- Do not let your filter freeze. This could damage the filter housing or the fibers themselves.
- Do not let your filter or reservoirs be exposed to excessive heat, greater than 115 degrees (i.e. in a hot car)
- Keep your vessels in the shade to minimize any sun exposure and heating of the water.
- Avoid using treated tap water if possible. Chemical treatments can leave a residual taste in the vessels. Do not use sports drinks or store anything other than water in your clean vessel.

WHAT'S IN THE BOX

- (A) 8-liter Untreated Water Reservoir (Grey)
- (B) 8-liter Clean Water Reservoir (Blue) with Cap
- (C) Filter Hose (with Grey 90-degree fitting on each end)
- (D) 0.1 Micron Biological Filter
- (E) Faucet Adapter
- (F) S-Biner Hanging Loop
- (G) Drink Tube with Blue Fitting (not shown)

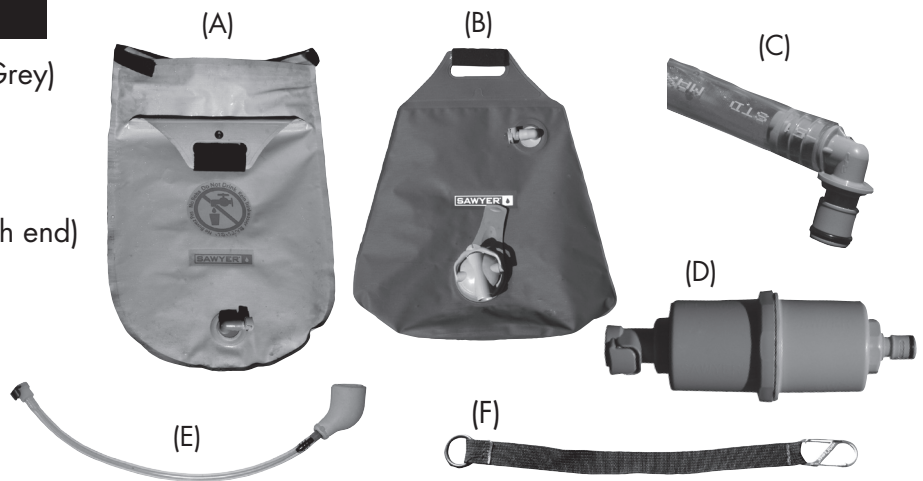

ASSEMBLING & USING THE SYSTEM

The color-coding makes it easy:
 GREY means untreated water; BLUE means filtered water.

- Attach Blue side of the Inline Filter into the fitting on the Blue Reservoir by clicking it to fasten. Make sure Dispensing Cap on Blue Reservoir is closed (Handle is flush with cap). Set Blue Reservoir on flat surface.
- Attach 90-degree Grey Fitting on Filter Hose to the Grey side of the Inline Filter (now attached to the Blue Reservoir) by clicking it to fasten.
- Open the top of the Grey Reservoir by unstrapping velcro attachments.
- Fill Grey Reservoir with untreated water source. (You can either use the reservoir to scoop water into the bag via the opening, place the opening under a running water source, or use any device for scooping and filling the bag through the top opening (cooking pot, coffee cup, etc.)
- Using S-Biner Loop, hang Grey Reservoir from a convenient tree branch, or place on a rock, etc., approximately 3-4 feet above the Blue Reservoir.
- Attach Filter Hose (already attached to the Blue Reservoir) to Grey Reservoir by clicking 90-degree Fitting onto the fitting on reservoir. (See illustration on right).

(See Over)



SAWYER®



B I O L O G I C A L W A T E R F I L T E R

INSTRUCTIONS FOR USE: Model SP188

- Observe the flow of water to the filter. If the flow is not continuous, disconnect the Filter Hose from the Filter to eliminate any “air locks” in the hose. Re-attach and resume filtering.
- Filtering has now begun, and you’re free to relax or perform other tasks around camp.
- After filtering process is complete, remove Filter Hose by unsnapping from Grey Reservoir Fitting (push button to release).
- Remove the Filter Hose from the filter and drain the hose. Remove the Filter from the Blue Reservoir.

USING YOUR FILTERED WATER

You are now able to safely use the clean, filtered water in the Blue Reservoir.

- Hang the Blue bag from its handle using the S-Biner Loop and fill your water bottles, pots and pans, etc.
- Attach the supplied Drink Tube and a Bite Valve of your choice (not included) and use in your pack as you would any hydration system.

CARE AND MAINTENANCE

- As with ALL soft sided water containers, certain beverages/drink mixes and/or waters (including some tap waters) may impart a taste onto the sidewalls of the container. If this occurs, dissolve 4 tablespoons of baking soda into 2 liters of warm water and place in container and let soak for an hour. Then rinse with clean water. Repeat if necessary. **DO NOT RUN THE SOLUTION THROUGH THE FILTER.** (While not harmful to the filter, it will need to be back washed if solution is passed through it.)

CLEANING (BACK WASHING) THE BIOLOGICAL FILTER:

The Biological Filter’s flow will start to slow down after use; this is normal. The quality of the water will greatly determine when this will happen. To extend the life of the filter, periodical back washing is suggested.

- Remove Biological Filter from its application.
- Insert the female quick release fitting on the Faucet Adapter (B) to the Outbound side of the filter (blue male fitting) Remember you are reversing the normal flow direction with this process
- Attach the faucet end of the adapter (B) to a faucet that is known to be of good quality water.
- Slowly turn on the faucet until a small stream comes out of the filter (you may need to hold the faucet adapter on the faucet).
- Let the water flow for about 20—30 seconds after water runs clear.
- Remove the faucet adapter tube from the Filter.
- Reinstall the Biological Filter being careful to properly align the flow direction of the filter to the direction of the water flow.
- The filter can be manually back washed in the field without the faucet adapter by applying body weight onto a soft-sided, clean water reservoir and reversing the flow through the filter. Remove the inlet hose to the filter and back wash at least 16 oz. (500ml) of clean water through the filter. Back washing must be accomplished using at least 2 psi greater back wash pressure than the pressure that was used for prior filtering.

SANITIZING THE BIOLOGICAL FILTER:

- Prior to long-term storage, or after extended use, the Biological Filter may be sanitized by adding a cap full of chlorine bleach to one quart of clean water, then passing it through the Biological Filter unit by squeezing on the bladder. Wait 20 minutes then drain the water from the Filter and hoses. Let air dry.

LEARN MORE AT WWW.SAWYER.COM --- WATCH A DEMONSTRATION VIDEO